
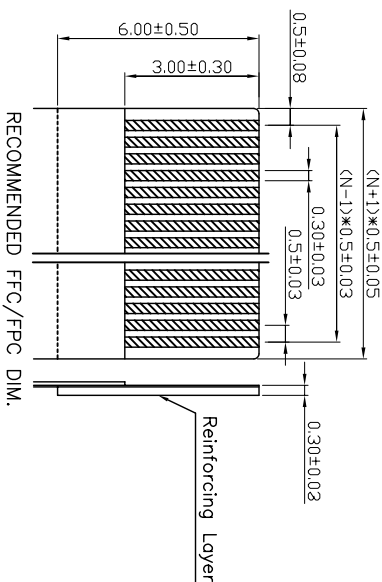

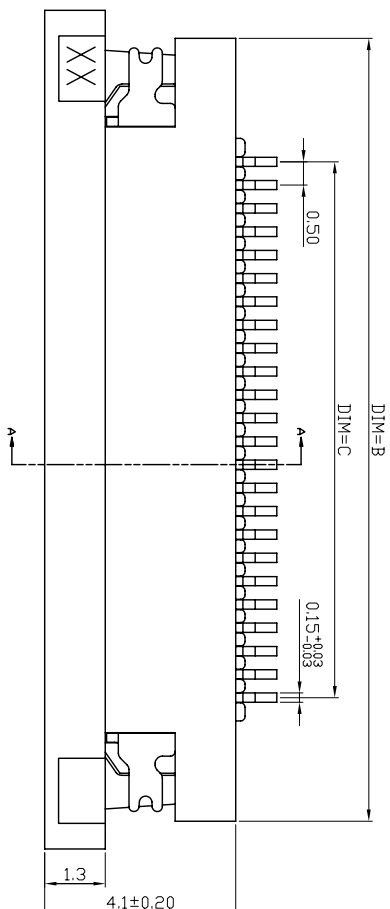
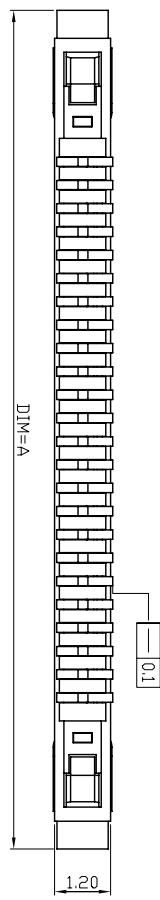


PIN数	DIM=A	DIM=B	DIM=C	DIM=D
50P	31.0	29.8	24.50	25.6
49P	30.5	29.3	24.00	25.1
48P	30.0	28.8	23.50	24.6
47P	29.5	28.3	23.00	24.1
46P	29.0	27.8	22.50	23.6
45P	28.5	27.3	22.00	23.1
44P	28.0	26.8	21.50	22.6
43P	27.5	26.3	21.00	22.1
42P	27.0	25.8	20.50	21.6
41P	26.5	25.3	20.00	21.1
40P	26.0	24.8	19.50	20.6
39P	25.5	24.3	19.00	20.1
38P	25.0	23.8	18.50	19.6
37P	24.5	23.3	18.00	19.1
36P	24.0	22.8	17.50	18.6
35P	23.5	22.3	17.00	18.1
34P	23.0	21.8	16.50	17.6
33P	22.5	21.3	16.00	17.1
32P	22.0	20.8	15.50	16.6
31P	21.5	20.3	15.00	16.1
30P	21.0	19.8	14.50	15.6
29P	20.5	19.3	14.00	15.1
28P	20.0	18.8	13.50	14.6
27P	19.5	18.3	13.00	14.1
26P	19.0	17.8	12.50	13.6
25P	18.5	17.3	12.00	13.1
24P	18.0	16.8	11.50	12.6
23P	17.5	16.3	11.00	12.1
22P	17.0	15.8	10.50	11.6
21P	16.5	15.3	10.00	11.1
20P	16.0	14.8	9.50	10.6
19P	15.5	14.3	9.00	10.1
18P	15.0	13.8	8.50	9.6
17P	14.5	13.3	8.00	9.1
16P	14.0	12.8	7.50	8.6
15P	13.5	12.3	7.00	8.1
14P	13.0	11.8	6.50	7.6
13P	12.5	11.3	6.00	7.1
12P	12.0	10.8	5.50	6.6
11P	11.5	10.3	5.00	6.1
10P	11.0	9.8	4.50	5.6
9P	10.5	9.3	4.00	5.1
8P	10.0	8.8	3.50	4.6
7P	9.5	8.3	3.00	4.1
6P	9.0	7.8	2.50	3.6
5P	8.5	7.3	2.00	3.1
4P	8.0	6.8	1.50	2.6

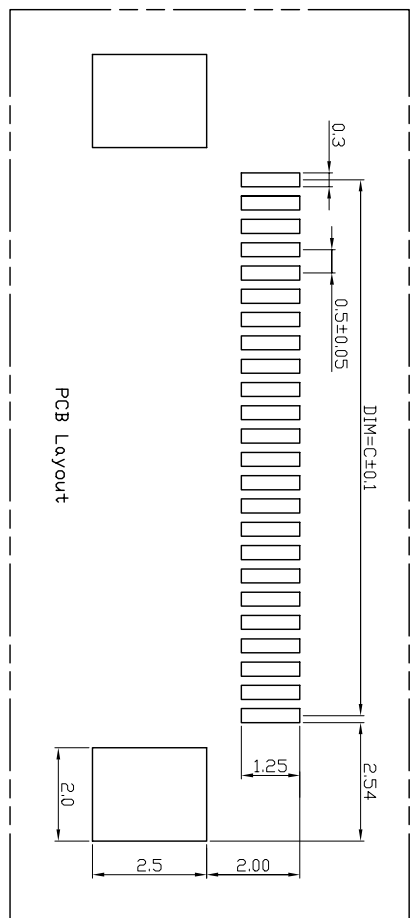

SECTION A-A
下接触

Electrical Characteristics:
 Current rating: 0.4A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: ≤ 20mΩ
 Insulation resistance: ≥ 500MΩ
 Relative Humidity: 93%+40°C

Material Description:
 Terminal: Phosphor Bronze Tin-plated
 Fitting Nail: Brass Tin-plated
 Housing: Thermoplastic(Ul94V-0)
 Slider: Thermoplastic(Ul94V-0)

NOTES:

1. PLASTIC BURRS 0.1mm MAX
 2. PART NO. SPECIFICATION: AF3HXXB*^ASOT110

PLASTIC SEMI-MANUFACTURED CODE
 NO. OF CONTACT CODE
 ABOVE CONTACT

PACKAGE CODE
 CUSTOMER MARK
 MATERIAL CODE

SERIAL CODE

SER AREA	REVISIONS	CHK	DATE

UNT	MM

APPROVED	DATE	PART NO.	
		AF3HXXB* ^A SOT110	
CHECKED	DATE	DRAWING NO.	
DRAWN	DATE	COMPUTER NO.	
黄孟奎	2009.07.01		
NUMBER	SCALE	SIZE	NAME
1/1	A4		FPC 0.3mm±0.20mm 端子成型图
REV	A		

深圳市三佐部品电子有限公司